



# INSTRUCTIONS


## METAL BUCKLE

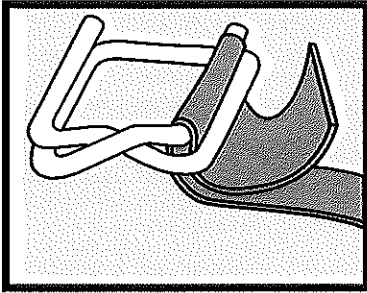

- 1 Insert end of strapping up through buckle and around open leg to form a loop. Pull loop tight around leg.

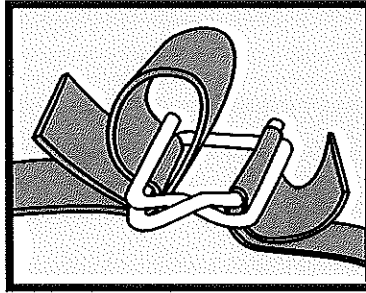


- 2 Wrap strapping around package. Loop strapping around remaining open leg of buckle. Pull loop tight around leg.

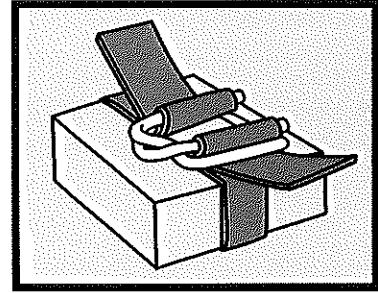


- 3 Hold package securely and tighten strap to desired tension using tensioner (see below).


## PLASTIC BUCKLE

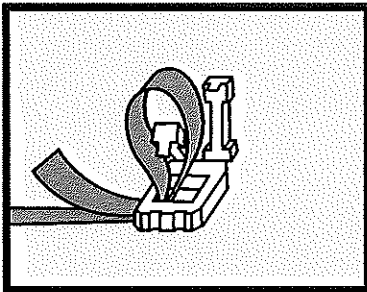

- 1 Make a small loop with strapping and insert through plastic buckle. Fold buckle leg into loop. Pull strap tight.

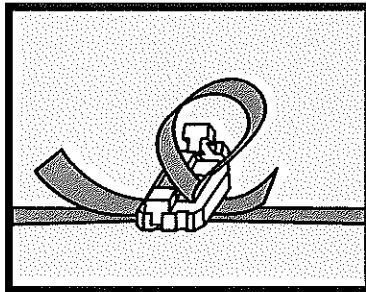


- 2 Wrap strapping around package and repeat step 1 with remaining end.

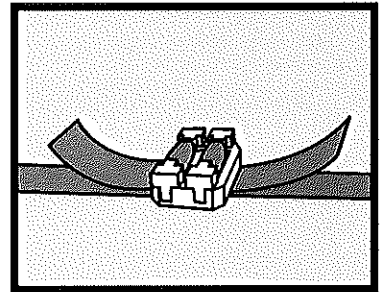


- 3 With both legs folded down, tighten strapping using the tensioner (see below).


## TENSIONER

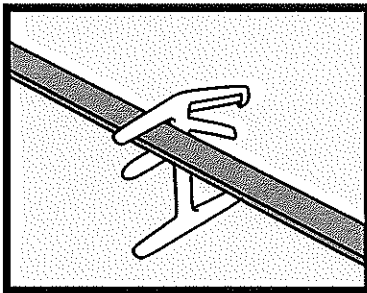

- 1 Excess strap should be removed. Insert remaining strapping between pulling-and-locking bars of tensioner

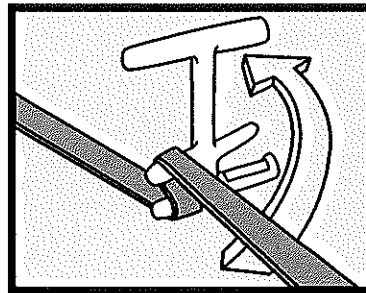

- 2 Flip tensioner up. Be sure to maintain strap alignment so slipping will not occur in next step.

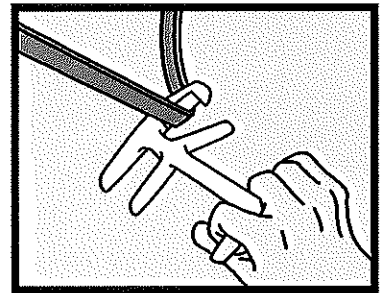

- 3 With free hand firmly gripping strap on corner of the carton, pull tensioner towards you. When desired tension is obtained, cut excess strap away with blade-end of tool.